


LISA-XP miniature lens for Cree XP-E series of LEDs




- Lens material optical grade PMMA with high UV and temperature resistance (105°C/220°F). Lens holder molded of high quality white ABS.
- High optical efficiency, up to 90%
- Integrated holder. Fastening of holder to PCB with appropriate adhesive, e.c. epoxy or polyurethane based. NOTE: DO NOT USE SUPERGLUE.
- Please check fastening details from this link: (http://www.ledil.com/datasheets/DataSheet_GLUES.pdf)
- Very small and compact dimensions: Diameter 10.5 mm, height 7 mm

LENS TYPES

NAME	ORDERING CODE	FWHM Angle
LISA-XP smooth spot	CA10641 Lisa-XP-SS	±9.4°
LISA-XP real spot	CA11627 Lisa-XP-RS	Coming soon


MEASUREMENT DATA & PHOTOGRAPHS

Relative Intensity of Lisa-XP-SS

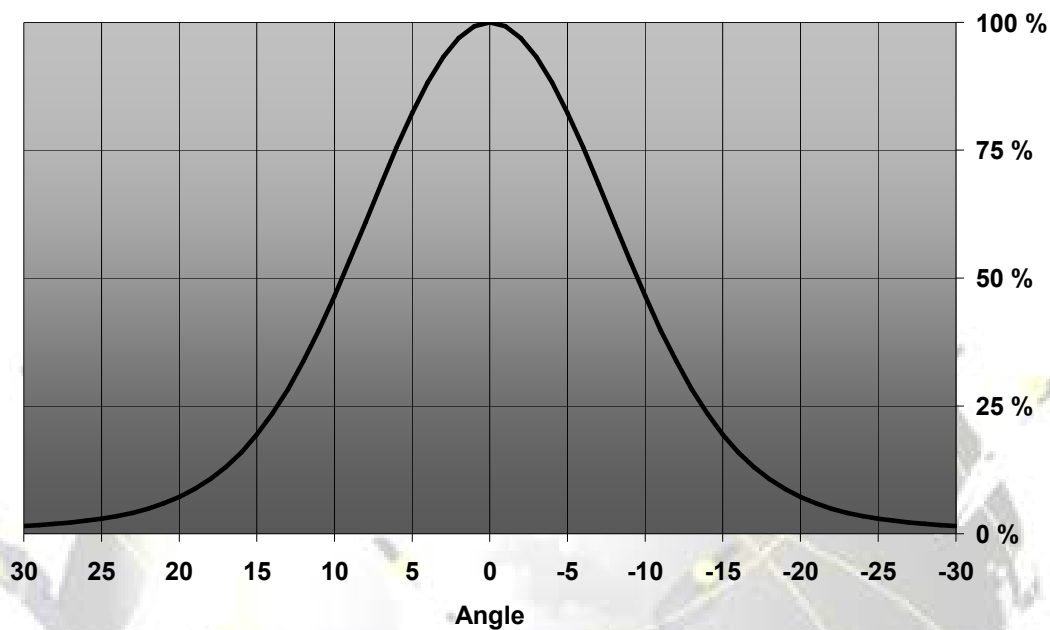

© Ledil Oy – PRELIMINARY - Subject to change without prior notice

DRAWINGS

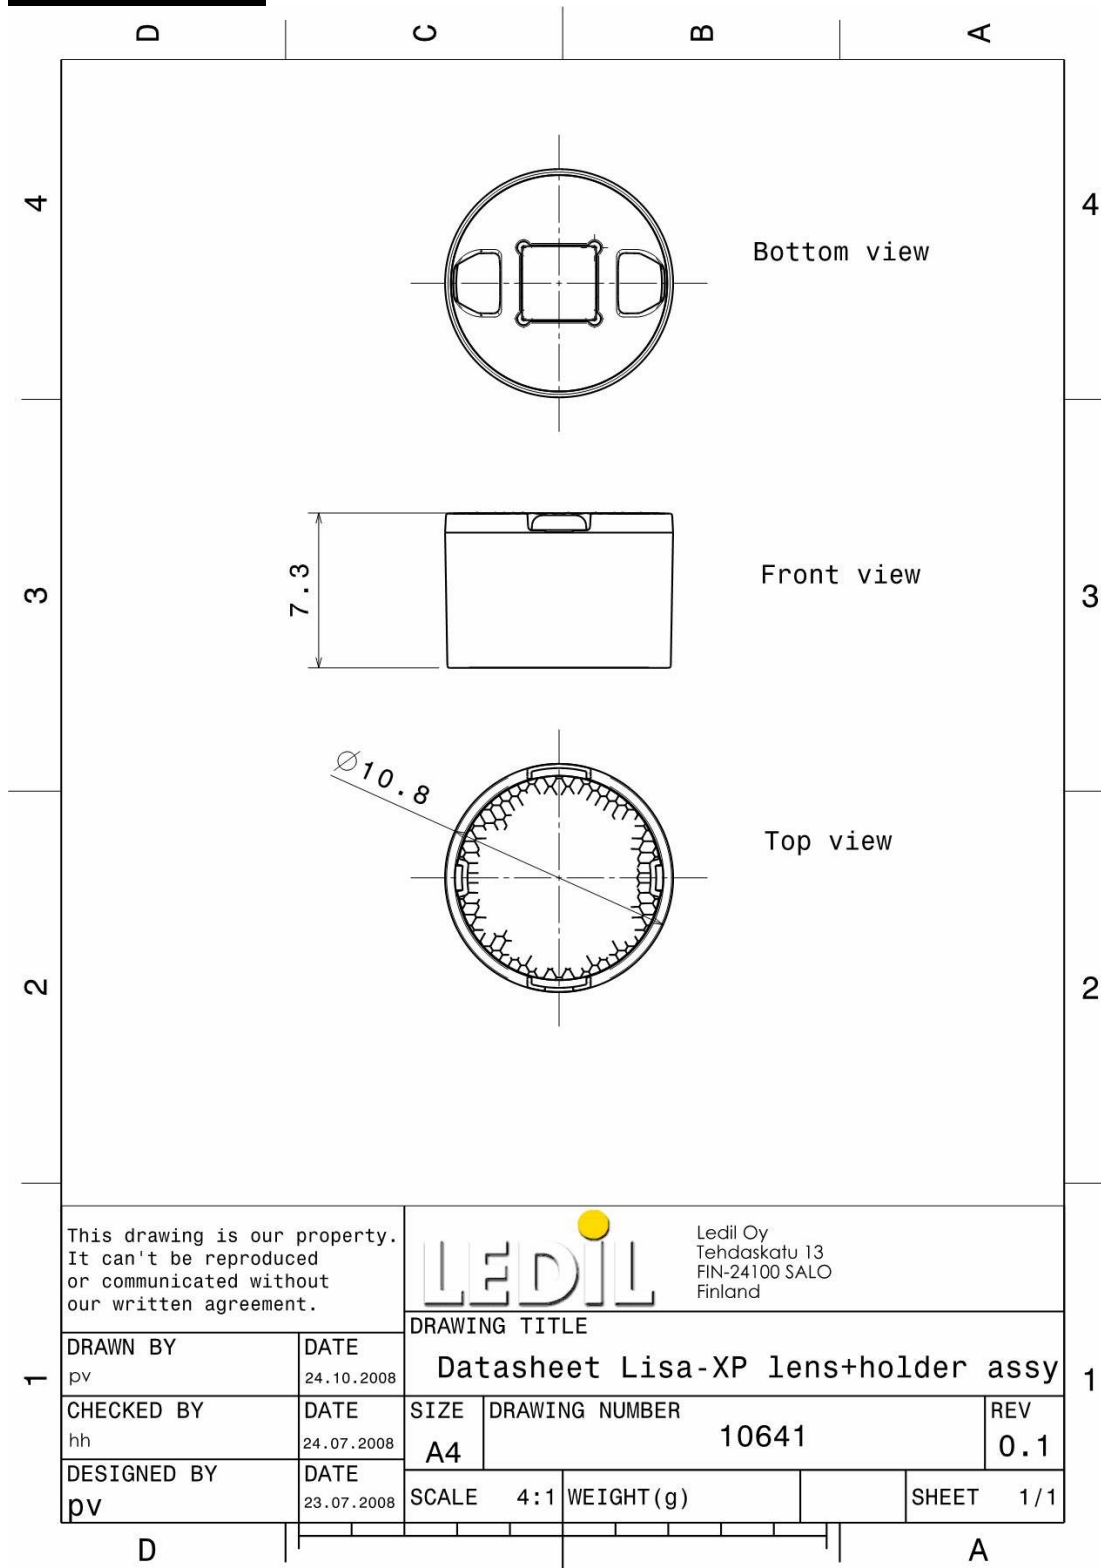

© Ledil Oy – PRELIMINARY - Subject to change without prior notice