

**SPECIFICATION FOR COTCO LED LAMP**

Document No: SPE/LP476PPG1-90G-03  
Model No : LP476PPG1-90G-03  
Rev. No: 02  
Date: 2005-07-07


Description:

90 Degree 7.6 x 7.6mm LED Lamp in Pure Green Color with Water Transparent Lens and Stopper

Dice Material: InGaN

Confirmed  
by Customer: \_\_\_\_\_

Date: \_\_\_\_\_

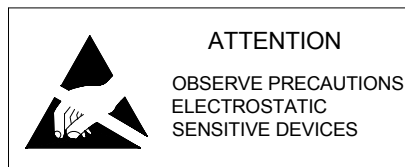

### Applications:

- Advertising Signs
- Indicators
- Message Board

### Absolute Maximum Ratings at Ta = 25°C


Items	Symbol	Absolute maximum Rating	Unit
Forward Current	$I_F$	30	mA
Peak Forward Current*	$I_{FP}$	100	mA
Reverse Voltage	$V_R$	5	V
Power Dissipation	$P_D$	132	mW
Operation Temperature	$T_{opr}$	-40 ~ +100	°C
Storage Temperature	$T_{stg}$	-40 ~ +100	°C
Lead Soldering Temperature	$T_{sol}$	Max.260°C for 3 sec Max. (3mm from the base of the epoxy bulb)	

\*pulse width  $\leq 0.1\text{msec}$  duty  $\leq 1/10$

### Typical Electrical & Optical Characteristics ( Ta = 25°C)

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	$V_F$	$I_F = 30\text{mA}$	---	3.6	4.4	V
Reverse Current	$I_R$	$V_R = 5\text{V}$	---	---	100	$\mu\text{A}$
Dominant Wavelength	$\lambda_D$	$I_F = 30\text{mA}$	515	527	535	nm
Luminous Intensity	$I_V$	$I_F = 30\text{mA}$	770	2300	---	mcd
50% Power Angle	$2\theta_{\frac{1}{2}H-H}$	$I_F = 30\text{mA}$	---	90	---	deg
	$2\theta_{\frac{1}{2}V-V}$	$I_F = 30\text{mA}$	---	35	---	deg

### Dimension Drawing

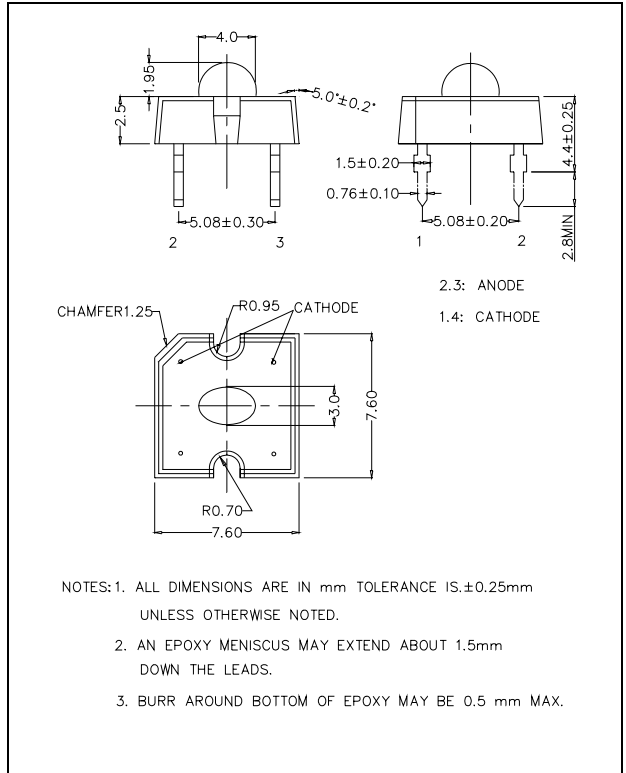


**Standard bins for LP476PPG1-90G-03 (I<sub>F</sub> = 30mA):**

Lamps are sorted to Luminous Intensity –I<sub>V</sub>, V<sub>F</sub> & Dominant Wavelength –λ<sub>D</sub> bins shown.

Orders for LP476PPG1-90G-03 may be filled with any or all bins contained as below.

All Luminous Intensity –I<sub>V</sub>, V<sub>F</sub> & Dominant Wavelength –λ<sub>D</sub> values shown and specified are at I<sub>F</sub> =30mA.

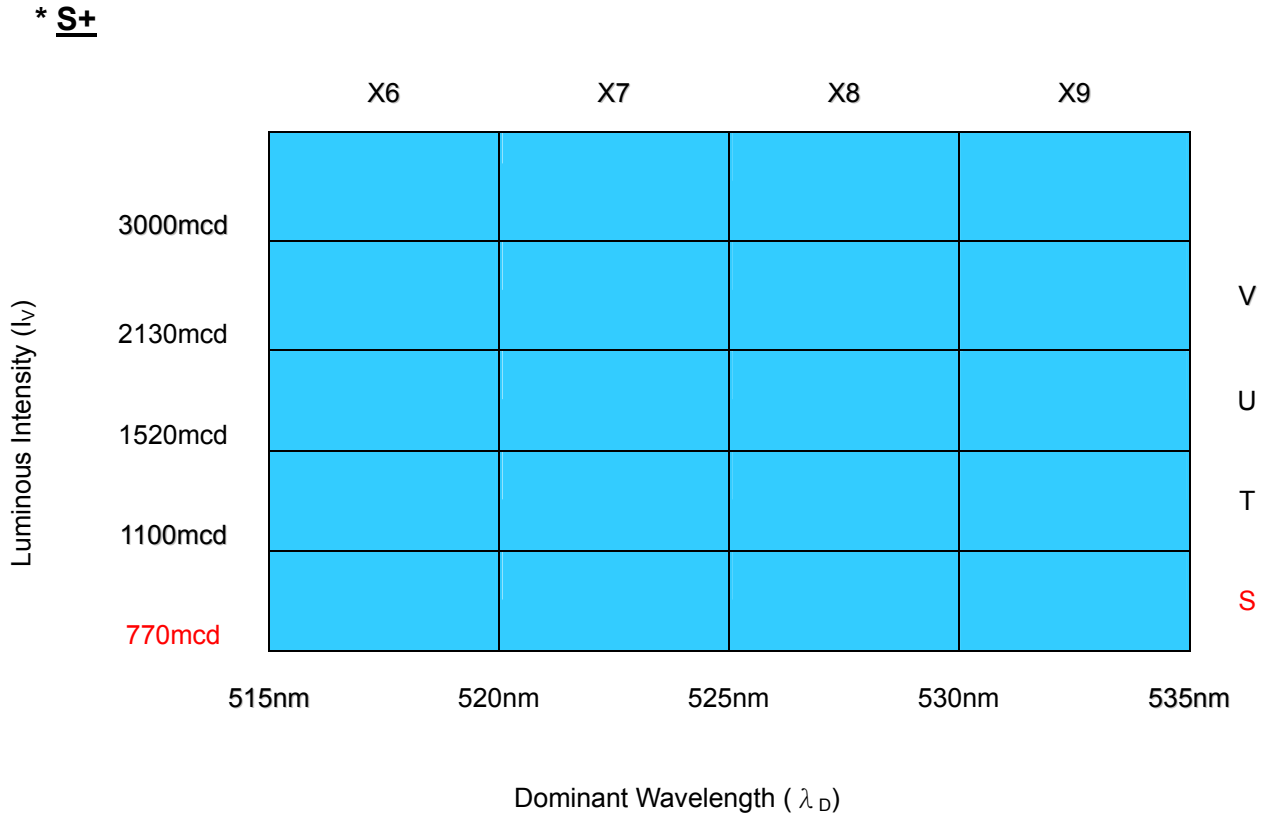

\* S+ indicates Luminous Intensity is at S bin or above.

**Forward Voltage (V<sub>F</sub>)**

Rank	V7	V8	V9	V10	V11	V12	V13	V14
Voltage	2.8-3.0V	3.0-3.2V	3.2-3.4V	3.4-3.6V	3.6-3.8V	3.8-4.0V	4.0-4.2V	4.2-4.4V

**Important Notes:**

- 1) All ranks will be included per delivery, rank ratio will be based on the Dices distribution.
- 2) Tolerance of measurement of luminous intensity is ±15%.
- 3) Tolerance of measurement of dominant wavelength is ±1nm.
- 4) Tolerance of measurement of Vf is ±0.05 V.
- 5) Packaging methods are available for selection, Please refer to PACKAGING STANDARD.
- 6) Please refer to LED LAMP RELIABILITY TEST STANDARD for reliability test conditions.
- 7) Please refer to APPLICATION NOTES for Application.

## Graphs

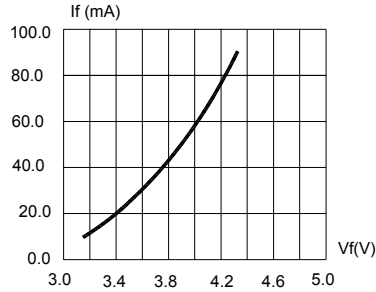


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

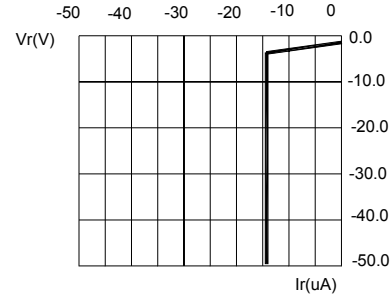


FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE.




FIG.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

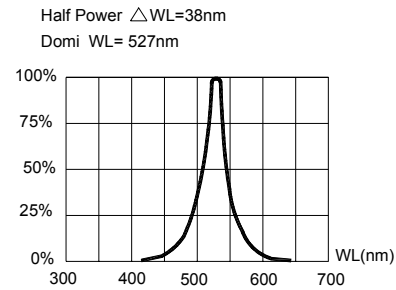


FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.

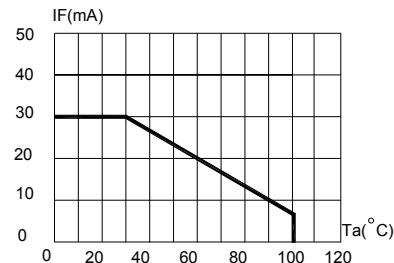


FIG.5 MAXIMUM FORWARD DC CURRENT VS AMBIENT TEMPERATURE ( $T_{jmax}=120^{\circ}\text{C}$ )

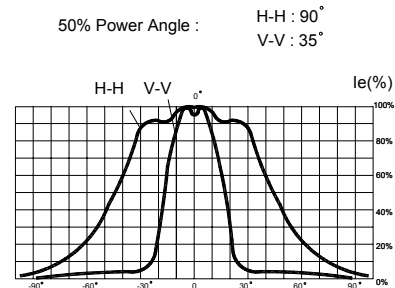


FIG.6 FAR FIELD PATTERN

Items	Signatures	Date
Prepared by	LiuZM	2005-07-07
Checked by	Aldosin	2005-07-07
Approved by	David	2005-07-07
FCN#	FCN20050221	

Revision History		
Rev. No	Date	Change Description
02	2005-07-07	Release. IV from T,U,V(typ)2000 to S,T,U,V(typ)2300mcd

Data is subject to change without prior notice; please refer to COTCO Website for the latest version.

Copyright©2002 Cotco International Ltd.