

Cree® 5mm Oval LED

C566C-RFS/AFS

Data Sheet

This oval LED is specifically designed for variable-message signs and passenger-information signs. The oval-shaped radiation pattern and high luminous intensity ensure that these devices are excellent for wide-field-of-view outdoor applications where a wide viewing angle and readability in sunlight are essential.

These lamps are tinted and diffused. The encapsulation resin contains anti-UV material in order to reduce the effects of long-term exposure to direct sunlight.



FEATURES

- Size (mm): 5
- Color and Typical Dominant Wavelength (nm):
Red (621)
Amber (591)
- Luminous Intensity (mcd)
Red (1100-4180)
Amber (1520-4180)
- Lead-Free
- RoHS Compliant

APPLICATIONS

- Electronic Signs & Signals (ESS)
- Full-Color Video Screen
- Motorway Signs
- Variable Message Sign (VMS)
- Advertising Signs
- Petrol Signs

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$)

| Items | Symbol | Absolute Maximum Rating | Unit |
|---|-----------|---|------------------|
| | | Red and Amber | |
| Forward Current | I_F | 50 ^{Note1} | mA |
| Peak Forward Current ^{Note2} | I_{FP} | 200 | mA |
| Reverse Voltage | V_R | 5 | V |
| Power Dissipation | P_D | 130 | mW |
| Operation Temperature | T_{opr} | -40 ~ +95 | $^\circ\text{C}$ |
| Storage Temperature | T_{stg} | -40 ~ +100 | $^\circ\text{C}$ |
| Lead Soldering Temperature | T_{sol} | Max. 260 $^\circ\text{C}$ for 3 sec. max. (3 mm from the base of the epoxy bulb) | |
| Electrostatic Discharge Classification (MIL-STD-883E) | ESD | Class 2 | |

Note:

- For long-term performance, the drive currents between 10 mA and 30 mA are recommended. Please contact a Cree sales representative for more information on recommended drive conditions.
- Pulse width ≤ 0.1 msec, duty $\leq 1/10$.

Typical Electrical & Optical Characteristics ($T_A = 25^\circ\text{C}$)

| Characteristics | Color | Symbol | Condition | Unit | Minimum | Typical | Maximum |
|---------------------|-----------|-------------|---------------|---------------|---------|---------|---------|
| Forward Voltage | Red/Amber | V_F | $I_F = 20$ mA | V | | 2.1 | 2.6 |
| Reverse Current | Red/Amber | I_R | $V_R = 5$ V | μA | | | 100 |
| Dominant Wavelength | Red | λ_D | $I_F = 20$ mA | nm | 619 | 621 | 624 |
| | Amber | λ_D | $I_F = 20$ mA | nm | 584 | 591 | 596 |
| Luminous Intensity | Red | I_v | $I_F = 20$ mA | mcd | 1100 | 2200 | |
| | Amber | I_v | $I_F = 20$ mA | mcd | 1520 | 2500 | |

Intensity Bin Limit ($I_F = 20 \text{ mA}$)

Red

| Bin Code | Min. (mcd) | Max. (mcd) |
|----------|------------|------------|
| T0 | 1100 | 1520 |
| U0 | 1520 | 2130 |
| V0 | 2130 | 3000 |
| W0 | 3000 | 4180 |

Amber

| Bin Code | Min. (mcd) | Max. (mcd) |
|----------|------------|------------|
| U0 | 1520 | 2130 |
| V0 | 2130 | 3000 |
| W0 | 3000 | 4180 |

Tolerance of measurement of luminous intensity is $\pm 15\%$

Color Bin Limit ($I_F = 20 \text{ mA}$)

Red

| Bin Code | Min. (nm) | Max. (nm) |
|----------|-----------|-----------|
| RB | 619 | 624 |

Amber

| Bin Code | Min. (nm) | Max. (nm) |
|----------|-----------|-----------|
| A2 | 584 | 587 |
| A3 | 587 | 590 |
| A4 | 590 | 593 |
| A5 | 593 | 596 |

Tolerance of measurement of dominant wavelength is $\pm 1 \text{ nm}$

Order Code Table*

| Color | Kit Number | Luminous Intensity (mcd) | | Dominant Wavelength | | | | Pack- age |
|-------|--------------------|--------------------------|------|---------------------|--------------|-----------|-----------|--------------|
| | | Min. | Max. | Color Bin | Min. (nm) | Color Bin | Max. (nm) | |
| Red | C566C-RFS-CT0W0BB1 | 1100 | 4180 | RB | 619 | RB | 624 | Bulk |
| Red | C566C-RFS-CU0V0BB1 | 1520 | 3000 | RB | 619 | RB | 624 | Bulk |
| Red | C566C-RFS-CV0W0BB1 | 2130 | 4180 | RB | 619 | RB | 624 | Bulk |
| Red | C566C-RFS-CT0W0BB2 | 1100 | 4180 | RB | 619 | RB | 624 | Ammo |
| Red | C566C-RFS-CU0V0BB2 | 1520 | 3000 | RB | 619 | RB | 624 | Ammo |
| Red | C566C-RFS-CV0W0BB2 | 2130 | 4180 | RB | 619 | RB | 624 | Ammo |

| Color | Kit Number | Luminous Intensity (mcd) | | Dominant Wavelength | | | | Pack- age |
|-------|--------------------|--------------------------|------|---------------------|--------------|-----------|-----------|--------------|
| | | Min. | Max. | Color Bin | Min. (nm) | Color Bin | Max. (nm) | |
| Amber | C566C-AFS-CU0W0251 | 1520 | 4180 | A2 | 584 | A5 | 596 | Bulk |
| Amber | C566C-AFS-CU0V0341 | 1520 | 3000 | A3 | 587 | A4 | 593 | Bulk |
| Amber | C566C-AFS-CV0W0341 | 2130 | 4180 | A3 | 587 | A4 | 593 | Bulk |
| Amber | C566C-AFS-CU0W0252 | 1520 | 4180 | A2 | 584 | A5 | 596 | Ammo |
| Amber | C566C-AFS-CU0V0342 | 1520 | 3000 | A3 | 587 | A4 | 593 | Ammo |
| Amber | C566C-AFS-CV0W0342 | 2130 | 4180 | A3 | 587 | A4 | 593 | Ammo |

Notes:

1. The above kit numbers represent order codes that include multiple intensity-bin and color-bin codes. Only one intensity-bin code and one color-bin code will be shipped on each reel. Single intensity-bin, single color-bin codes will not be orderable.
2. Please refer to the "Cree LED Lamp Reliability Test Standards" document for reliability test conditions.
3. Please refer to the "Cree LED Lamp Soldering & Handling" document for information about how to use this LED product safely.

Graphs

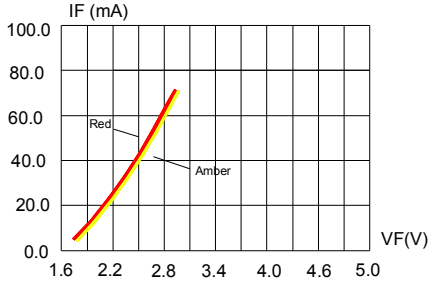


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.



FIG.2 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

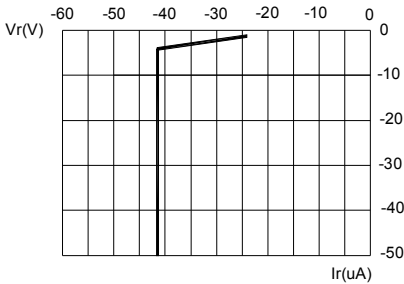


FIG.3 RED & AMBER REVERSE CURRENT VS. REVERSE VOLTAGE.

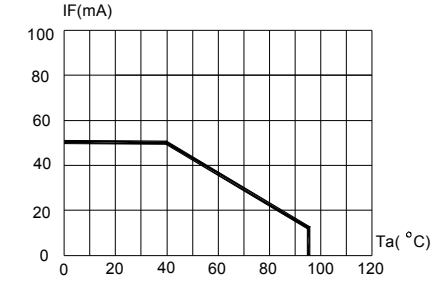


FIG.4 RED & AMBER MAXIMUM FORWARD DC CURRENT VS AMBIENT TEMPERATURE (Tjmax=105°C)

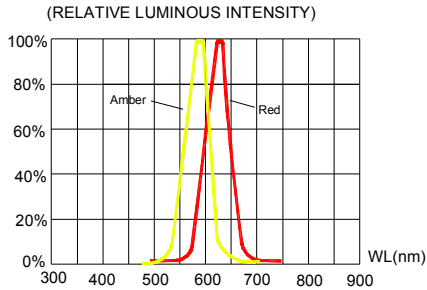


FIG.5 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.

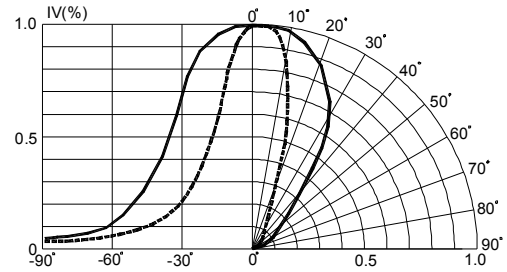



FIG.6 RED & AMBER FAR FIELD PATTERN

Mechanical Dimensions

All dimensions are in mm. Tolerance is ± 0.25 mm unless otherwise noted.

An epoxy meniscus may extend about 1.5 mm down the leads.

Burr around bottom of epoxy may be 0.5 mm max.

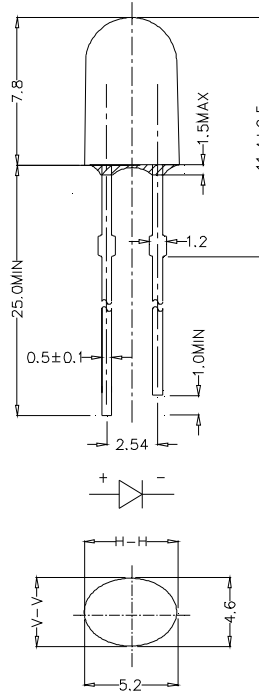

Notes

RoHS Compliance

The levels of environmentally sensitive, persistent biologically toxic (PBT), persistent organic pollutants (POP), or otherwise restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2002/95/EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS), as amended through April 21, 2006.


Vision Advisory Claim

Users should be cautioned not to stare at the light of this LED product. The bright light can damage the eye.

Kit Number System

Cree LED lamps are tested and sorted into performance bins. A bin is specified by ranges of color, forward voltage, and brightness. Sorted LEDs are packaged for shipping in various convenient options. Please refer to the "Cree LED Lamp Packaging Standard" document for more information about shipping and packaging options.

Cree LEDs are sold by order codes in combinations of bins called kits. Order codes are configured in the following manner:

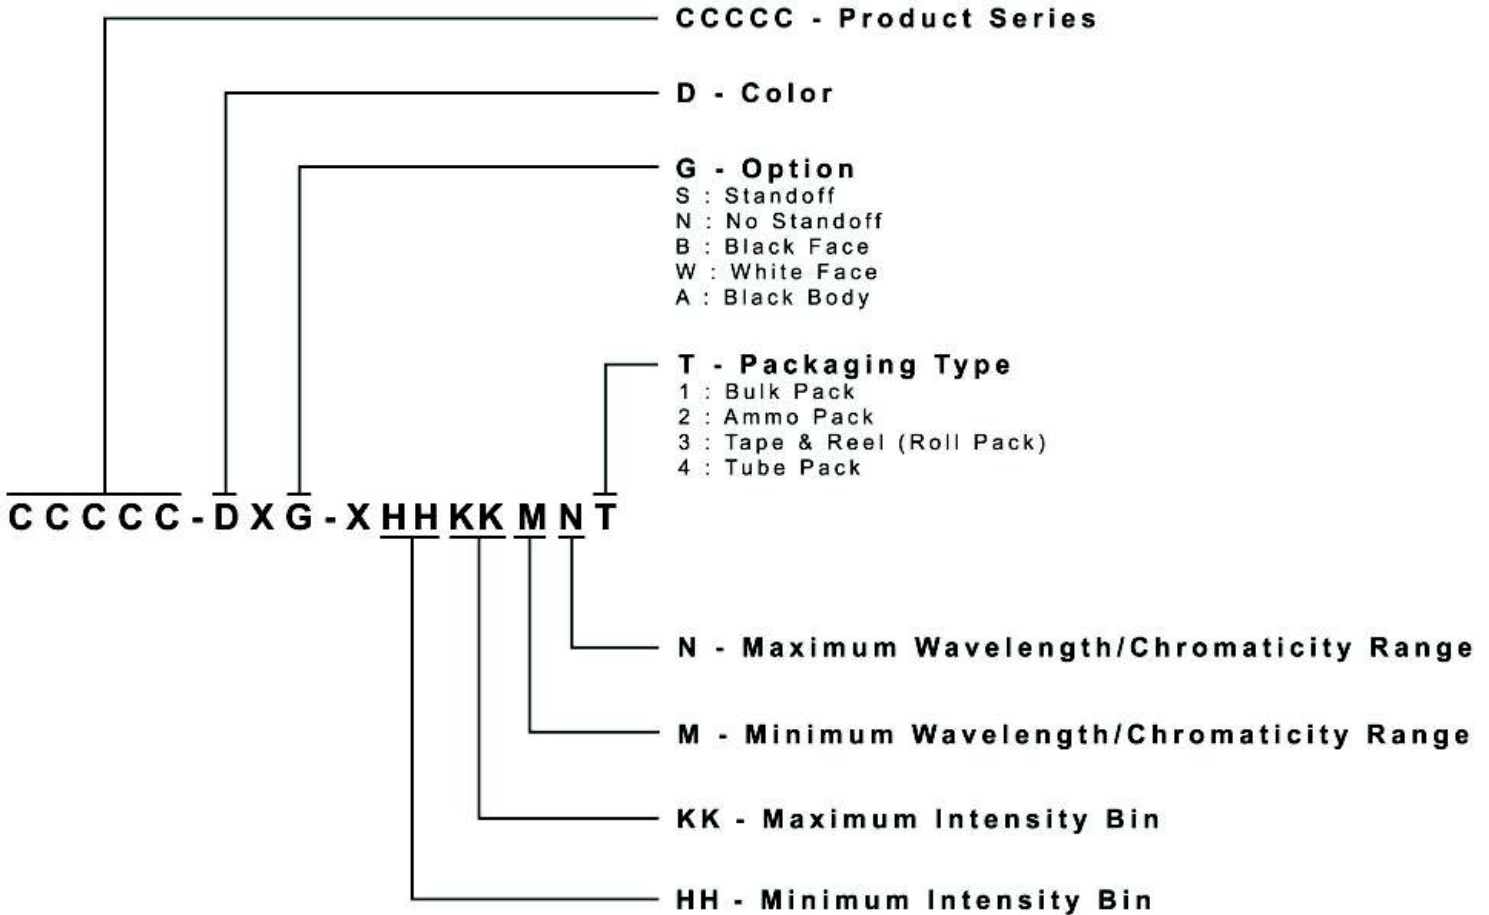


Package

Features:

- The LEDs are packed in cardboard boxes after packaging in normal or anti-electrostatic bags.
- Cardboard boxes will be used to protect the LEDs from mechanical shock during transportation.
- The boxes are not water resistant, and they must be kept away from water and moisture.
- There are two types of packaging: Bulk Pack and Ammo Pack.
- 500 pcs per bulk and 3000 pcs per ammo.

Bulk Pack Packaging Type:

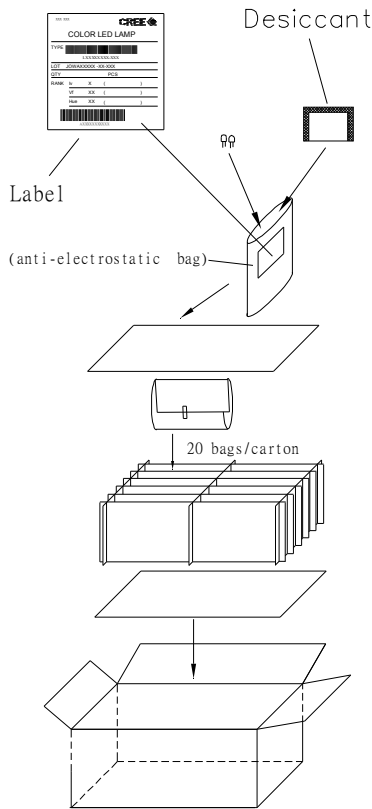

Ammo Pack Packaging Type:

